


# EPOXY & COMPOSITE CURING BLANKETS

Powerblanket® has combined our temperature control expertise with increased durability in THERMAL CURING TECHNOLOGY for epoxy and composites used in industries such as AEROSPACE, MARINE, and WIND ENERGY.

**powerblanket**  
WWW.POWERBLANKET.COM



- **QUICK LEAD TIMES**  
With New Custom Designs  
in 1-2 weeks
- **PORTABILITY**  
Enables Production &  
In Field Repair
- **SPEED UP CURING TIME**  
Allowing Increased  
Throughput & Consistency
- **Most DURABLE  
CURING BLANKETS  
On The Market**
- **EFFICIENCY**  
Eliminates Need for  
Costly Alternative  
Heating Solutions

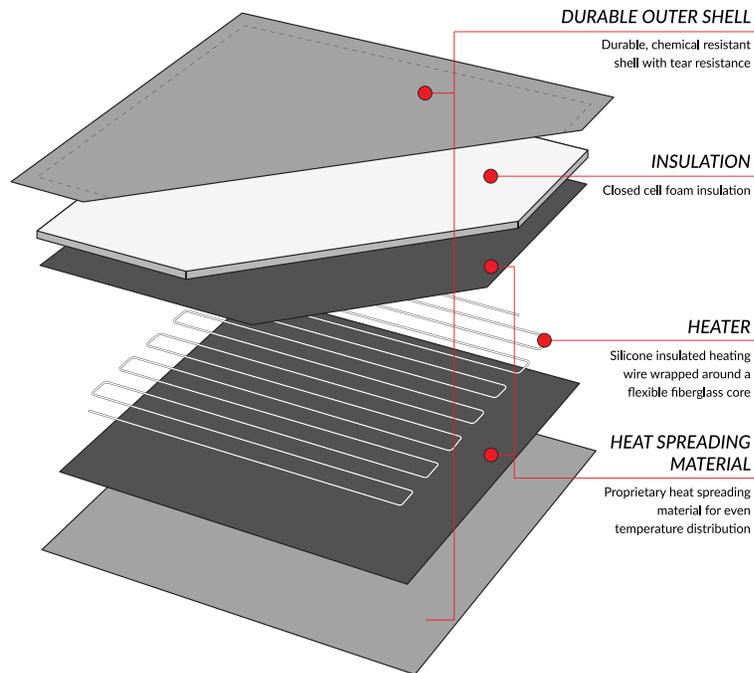

## Why Choose Powerblanket's Epoxy & Composite Curing Blankets?

- Available in any width and length required
- Up to 80 Watts per Square Foot Maximum  
internal blanket temperature:  $200 \pm 9^{\circ}\text{F}$  ( $93 \pm 5^{\circ}\text{C}$ )
- Custom solutions up to  $400^{\circ}\text{F}$  ( $204^{\circ}$ ) and 300 watts per square foot
- Custom designs to fit any application

*powerblanket*



## READY TO UPGRADE YOUR HEATING?

PART NUMBER	HEATED AREA	WATTS	VOLTAGE	AMPS	CORD & PLUG	VINYL	INTERNAL THERMOSTAT	THERMOSTATIC CONTROLLER	ADDITIONAL FEATURES
CBEX24X24	24" x 24"	210	120	1.75	6ft cord, 5-15 plug	Gray Alloy	93°C / 199°F	GHT with 6 foot cord	Strap for GHT, Pouch for RTD probe, RTD can be internal to blanket
CBEX20X36	20" x 36"	327	120	2.75	6ft cord, 5-15 plug	Gray Alloy	93°C / 199°F	GHT with 6 foot cord	Strap for GHT, Pouch for RTD probe, RTD can be internal to blanket
CBEX20X78	20" x 78"	700	120	5.83	6ft cord, 5-15 plug	Gray Alloy	93°C / 199°F	GHT with 6 foot cord	Strap for GHT, Pouch for RTD probe, RTD can be internal to blanket
CBEX36X39	36" x 39"	654	120	5.45	6ft cord, 5-15 plug	Gray Alloy	93°C / 199°F	GHT with 6 foot cord	Strap for GHT, Pouch for RTD probe, RTD can be internal to blanket
CBEX36X78	36" x 78"	1248	120	10.4	6ft cord, 5-15 plug	Gray Alloy	93°C / 199°F	GHT with 6 foot cord	Strap for GHT, Pouch for RTD probe, RTD can be internal to blanket

Our PATENTED DESIGN eliminates hot spots and ensures process accuracy.

### GET YOUR CUSTOM SOLUTION STARTED

**CONTACT** Jerry Piggott • (801) 456-8011 (Office) • [jpiggott@powerblanket.com](mailto:jpiggott@powerblanket.com)

